

Date: Monday, 2/27/2006 4:18:10 PM
 User: Kim Johnston

Process Sheet

Customer : CU-DAR001 Dart Helicopters Services Drawing Name : STRUT
 Job Number : 25976
 Estimate Number : 10285
 P.O. Number : NIA Part Number : D2565111
 This Issue : 2/27/2006 S.O. No. : NIA Drawing Number : D2565 REV E
 Prsht Rev. : NC Project Number : N/A
 First Issue : NIA Type : SMALL / MED FAB Drawing Revision : E
 Previous Run : 24278 Material : NIA
 Written By : See COMMENT Below Due Date : 3/20/2006 Qty: 20 Um: Each
 Checked & Approved By : 06-02-28
 Comment : Est: E 01.06.04 Added Powder Coat, Removed Polish, and
 Added Inspection Levels 3 & 21 EC

Additional Product

Job Number:



Seq. #: Machine Or Operation: Description :

1.0 M304TR0750W049 304 RD Tube .750 x .049W



Comment: Qty.: 1.1944 f(s)/Unit Total: 23.8875 f(s)
 Material: 304/316 SS tubing 0.750" Dia. x 0.049" wall
 (M304TR0750W049) Batch No: M100309

SB 06/03/09

2.0 BRAKE NC NC BRAKE



Comment: BRAKE NC
 Punch: as per Dwg D2565 using DT 8313

SB 06/03/09

3.0 SMALL FAB 1 SMALL & MEDIUM FAB RESOURCE 1



Comment: SMALL & MEDIUM FAB RESOURCE 1
 Deburr and polish

SAD 06-03-12

4.0 QC2 INSPECT PARTS AS THEY COME OFF MACHINE



Comment: INSPECT PARTS AS THEY COME OFF MACHINE

N/A

5.0 QC5 SECOND CHECK



Comment: SECOND CHECK

PTO 06-03-13

6.0 POWDER COATING POWDER COATING



Comment: POWDER COATING
 Powder Coat White (Ref: 4.3.5.2) as per QSI 005 4.3






a.m 06-03-29

20

Dart Aerospace Ltd

W/O:		WORK ORDER CHANGES					
DATE	STEP	PROCEDURE CHANGE	By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector

Part No: _____ PAR #: _____ Fault Category: _____ NCR: Yes ☐ No ☒ DQA: ☒ Date: 06/03/13
 QA: N/C Closed: _____ Date: _____

NCR:		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			
060313	2	2 strut, 100 - 125 under size from hole to hole Parts pre scrap.		Scrap: destroy Add 1 from w/o 25974	 06-03-13	 06-03-13		 06-03-13

NOTE: Date & initial all entries

Date: Monday, 2/27/2006 4:18:11 PM
User: Kim Johnston

Process Sheet

Customer: CU-DAR001 Dart Helicopters Services

Drawing Name: STRUT

Job Number: 25976

Part Number: D2565111

Job Number:



Seq. #:

Machine Or Operation:

Description :

7.0

QC3

INSPECT POWDER COAT/CHEMICAL CONVERSION



Comment: INSPECT POWDER COAT

11 06 03 30

(20)

8.0

PACKAGING 1

PACKAGING RESOURCE #1



Comment: PACKAGING RESOURCE #1

Identify and Stock

Location: 85

04/3/30 19

9.0

DC

DOCUMENT CONTROL



Comment: DOCUMENT CONTROL

Inspection Level 21

06/03/31 (11)

Job Completion



06.03.30

Dart Aerospace Ltd

W/O:		WORK ORDER CHANGES					
DATE	STEP	PROCEDURE CHANGE	By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector

Part No: _____ PAR #: _____ Fault Category: _____ NCR: Yes No DQA: _____ Date: _____

QA: N/C Closed: _____ Date: _____


NCR:		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			

NOTE: Date & initial all entries



DESIGN	DRAWN BY	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
CHECKED	APPROVED	DRAWING NO. D2565	REV. E SHEET 1 OF 1
DATE 04.05.05		TITLE STRUT	SCALE 1:3
A	96.05.03	NEW ISSUE	
B	97.03.15	CORRECT D2565-111 DIM. A	
C	98.10.05	UPDATED MATERIAL NOTE (TSR A603)	
D	02.06.05	ADD -3XX PARTS; ADD FINISH	
E	04.05.05	ADD D2565-401-411; RMV ANGLE D	

RELEASED
04.05.05

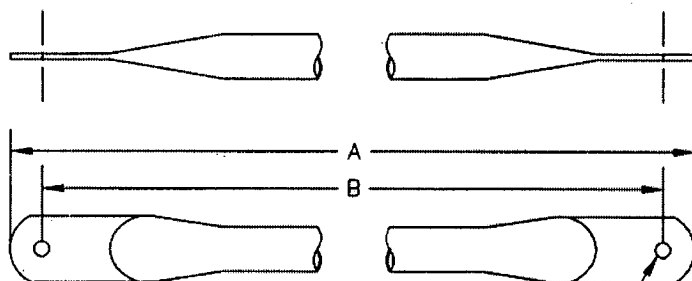

DIA 0.257 TO BE PUNCHED
"C" DIA TO BE OPENED MANUALLY
PUNCH ENDS PER SPEC CONTROL DRAWING D2638

PART #	A	B	DIA C
D2565-101	20.52	19.72	0.316
D2565-103	18.21	17.41	0.316
D2565-105	20.19	19.39	0.316
D2565-107	13.43	12.63	-
D2565-109	12.31	11.51	-
D2565-111	13.65	12.85	-
D2565-201	22.79	22.00	0.316
D2565-203	20.75	19.95	0.316
D2565-205	21.22	20.42	0.316
D2565-207	16.07	15.27	-
D2565-209	15.16	14.36	-
D2565-211	14.14	13.34	-
D2565-301	27.03	26.23	0.316
D2565-303	25.34	24.54	0.316
D2565-305	23.73	22.93	0.316
D2565-307	20.86	20.06	-
D2565-309	20.17	19.37	-
D2565-311	16.30	15.50	-
D2565-401	18.29	17.49	0.316
D2565-403	15.64	14.84	0.316
D2565-405	19.45	18.65	0.316
D2565-407	10.79	9.99	-
D2565-409	9.34	8.54	-
D2565-411	13.81	13.01	-

GENERAL NOTES

- 1) MATERIAL: AISI 304/316/318 SS 0.750 OD X 0.049 WALL
(REF DART SPEC. M304TR0.750W0.049)
ENSURE SEAMLESS TUBE IS USED
- 2) FINISH: POWDER COAT WHITE (4.3.5.2) PER DART QSI 005 4.3
- 3) TOLERANCES PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) ALL DIMENSIONS ARE IN INCHES

SHOP COPY
RETURN TO
ENGINEERING
UNCONTROLLED COPY
SUBJECT TO AMENDMENT
WITHOUT NOTICE
WORK ORDER
NO. 25976

Copyright © 1996 by DART AEROSPACE LTD

THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.